



邯郸市华铭紧固件有限公司
Handan Huaming Fastener Co., LTD

CONTACT US

E-mail: zjhjms318@163.com

Telephone: +86 151 7502 9899 +86 181 3102 9360

Address: Yongnian county, Handan city, Hebei province, China

HM HUAMING
FASTENER

华铭紧固件



邯郸市华铭紧固件有限公司
Handan Huaming Fastener Co., LTD

HUAMING

华铭紧固件

邯郸市华铭紧固件有限公司位于河北省邯郸市永年区东洛阳工业区, 占地面积6000平米。我公司成立于2019年, 目前拥有螺母冷墩机20台, 滚丝机20台, 车修壁虎及螺栓生产设备十余套, 月产量可达千吨。

我司主要生产及经营: 车修壁虎, 内迫壁虎, 三片壁虎, 四片壁虎, 套管壁虎, 中空壁虎, 牙条, 螺母, 螺栓等各类紧固件产品。

我司产品主要用于出口, 与众多国内优秀的贸易公司有着良好的合作关系, 同时我司也拥有自营进出口权, 产品远销东南亚, 中东, 东欧, 南美等世界各地。

期待与您的合作!

Handan Huaming Fastener Co., Ltd is located in the Dongmingyang industrial zone, Yongnian county, Handan city, Hebei province, covering an area of 6000 square meters.

Our company was established in 2019, until this moment we have 20 sets of nuts cold forging machines, 20sets of wire rolling machines and more than 10 sets of machines for producing wedge anchor&hex bolts with monthly output can reach thousands of tons.

Our mainly produce and operate in wedge anchor, drop in anchor, 3pcs fix bolt, 4pcs fix bolt, sleeve anchor, hollow anchor, threaded rods, nuts, bolts, etc.

Our products are mainly for exporting, and we have good cooperative relations with many excellent trading companies. We also has its own import and export rights. Our products are exported to Southeast Asia, the Middle East, Eastern Europe, South America and other parts of the world.

Looking forward to working with you.

生产设备与车间

Production equipment and workshop




HEX BOLT 六角螺栓

Standard: DIN, ANSI, BSW

Material: Q195, C1035K carbon steel;

Finish: Blue ZP, Yellow ZP, Black, Hot Dip Galvanized

Grade: 4.8 8.8 10.9 12.9



DIN 933 standard

单位: mm

公称直径	螺距	A		K		B		S		
		max	min	max	min	max	min	A	B	
M1.6	0.35	1.22	0.98	/	/	/	/	3.2	3.02	/
M2	0.4	1.52	1.28	/	/	/	/	4	3.82	/
M2.5	0.45	1.82	1.58	/	/	/	/	5	4.82	/
M3	0.5	2.12	1.88	/	/	/	/	5.5	5.32	/
M3.5	0.6	2.52	2.28	/	/	/	/	6	5.82	/
M4	0.7	2.92	2.68	/	/	3	2.6	7	6.78	6.64
M5	0.8	3.65	3.35	3.74	3.26	8	3.26	8	7.78	7.64
M6	1	4.15	3.85	4.24	3.76	10	4.24	10	9.78	9.64
M7	1	4.95	4.65	5.04	4.56	11	5.04	11	10.73	10.57
M8	1.25	5.45	5.15	5.54	5.06	13	5.54	13	12.73	12.57
M10	1.5	6.56	6.22	6.69	6.11	17	6.69	17	16.73	16.57
M12	1.75	7.68	7.32	7.79	7.21	19	7.79	19	18.67	18.48
M14	2	8.98	8.62	9.09	8.51	22	9.09	22	21.67	21.16
M16	2	10.18	9.82	10.29	9.71	24	10.29	24	23.67	23.16
M18	2.5	11.72	11.28	11.85	11.15	27	11.85	27	26.67	26.15
M20	2.5	12.72	12.28	12.85	12.15	30	12.85	30	29.67	29.16
M22	2.5	14.22	13.78	14.35	13.65	32	14.35	32	31.61	31
M24	3	15.22	14.78	15.35	14.65	36	15.35	36	35.38	35
M27	3	/	/	17.35	16.65	41	17.35	41	/	40
M30	3.5	/	/	19.12	18.28	46	19.12	46	/	45
M33	3.5	/	/	21.42	20.58	50	21.42	50	/	49
M36	4	/	/	22.92	22.08	55	22.92	55	/	53.8
M39	4	/	/	25.42	24.58	60	25.42	60	/	58.8
M42	4.5	/	/	26.42	25.58	65	26.42	65	/	63.1
M45	4.5	/	/	28.42	27.58	70	28.42	70	/	68.1
M48	5	/	/	30.42	29.58	75	30.42	75	/	73.1
M52	5	/	/	33.5	32.5	80	33.5	80	/	78.1


HEX NUT 六角螺母

Standard: DIN, ANSI B18.2.2, BSW

Material: Q195, C1035K carbon steel;

Finish: Blue ZP, Yellow ZP, Black, Hot Dip Galvanized

Grade: 4.8 8.8 10.9 12.9



DIN 934 standard

单位: mm

公称直径	螺距	m		S		D		P		m		S	
		max	min	max	min	max	min	max	min	max	min		
M1	0.25	0.8	0.55	2.5	2.4	M27	3	22	20.7	41	40		
M1.2	0.25	1	0.75	3	2.9	M30	3.5	24	22.7	46	45		
M1.4	0.3	1.2	0.95	3	2.9	M33	3.5	26	24.7	50	49		
M1.6	0.35	1.3	1.05	3.2	3.02	M36	4	29	27.4	55	53.8		
M1.7	0.35	1.4	1.15	3.5	3.38	M39	4	31	29.4	60	58.8		
M2	0.4	1.6	1.35	4	3.82	M42	4.5	34	32.4	65	63.1		
M2.3	0.45	1.8	1.55	4.5	4.32	M45	4.5	36	34.4	70	68.1		
M2.5	0.45	2	1.75	5	4.82	M48	5	38	36.4	75	73.1		
M2.6	0.45	2	1.75	5	4.82	M52	5	42	40.4	80	78.1		
M3	0.5	2.4	2.15	5.5	5.32	M56	5.5	45	43.4	85	82.8		
M3.5	0.6	2.8	2.55	6	5.82	M60	5.5	48	46.4	90	87.8		
M4	0.7	3.2	2.9	7	6.78	M64	6	51	49.1	95	92.8		
M5	0.8	4	3.7	8	7.78	M68	6	54	52.1	100	97.8		
M6	1	5	4.7	10	9.78	M72	6	58	56.1	105	102.8		
M7	1	5.5	5.2	11	10.73	M76	6	61	59.1	110	107.8		
M8	1.25	6.5	6.14	13	12.73	M80	6	64	62.1	115	112.8		
M10	1.5	8	7.64	17	16.73	M85	6	68	66.1	120	117.8		
M12	1.75	10	9.64	19	18.67	M90	6	72	70.1	130	127.5		
M14	2	11	10.3	22	21.67	M100	6	80	78.1	145	142.5		
M16	2	13	12.3	24	23.67	M110	6	88	85.8	155	152.5		
M18	2.5	15	14.3	27	26.16	M125	6	100	97.8	180	177.5		
M20	2.5	16	14.9	30	29.16	M140	6	112	109.8	200	195.4		
M22	2.5	18	16.9	32	31	M160	6	128	125.5	230	225.4		
M24	3	19	17.7	36	35								

WEDGE ANCHORS

车修壁虎

Size: M6-M24;

Material: Q195, C1035K carbon steel;

Surface treatment: blue and yellow zinc or hot dip galvanized;



Size	Kgs/1000pcs	Size	Kgs/1000pcs	Size	Kgs/1000pcs
6*50	12.15	12*90	86.5	16*200	302
6*60	13.7	12*100	92.7	16*220	325.5
6*70	15.25	12*110	99.8	16*250	363.2
6*80	16.8	12*120	106.7	16*260	375.9
6*50	24.2	12*125	110.2	16*280	401.1
6*60	27	12*140	113.7	16*300	426.4
6*70	30	12*150	125.2	20*100	273.8
6*75	31.5	12*160	128.1	20*120	314.4
6*80	33	12*180	147.3	20*125	325.4
8*100	39	12*200	159.4	20*140	355.4
8*120	45	14*100	130.1	20*150	370
10*60	45.2	14*120	148.1	20*160	384.4
10*70	49.7	14*150	175.2	20*180	434.3
10*75	52.1	14*200	220.1	20*200	468.6
10*80	54.4	16*100	172.3	20*220	514.4
10*90	58.9	16*110	185	20*250	580
10*95	61.3	16*120	197.8	20*260	592.4
10*100	63.6	16*125	205	20*290	651.4
10*110	68.3	16*140	224.5	20*300	680
10*120	73.4	16*145	230.9	24*150	570
10*130	78.1	16*150	236	24*200	720
10*150	87.5	16*160	248.6	24*250	890
10*200	110.4	16*170	260.5	24*300	1040
12*60	79.6	16*180	272.6	24*350	1215

以上数据仅供参考，单重以实际出货为准。
The above data is for reference only. The unit weight is subject to the actual shipment.



3PCS FIX BOLTS COMPLETE

三片壁虎

Size: M6-M16;

Material: carbon steel;

Surface treatment: blue and yellow zinc

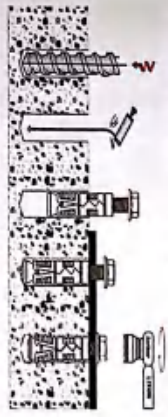

规格 SIZE	L	D	管重量 Pipeline Weight	M	成重总重 Weight
M6	45	10	15.5	6*50	25-26
M8	50	13	20.2	8*60	42-43
M10	60	17	31.3	10*70	73-75
M12	80	19	55.1	12*90	132-136
M16	100	24	131	16*110	313-316


以上数据仅供参考，单重以实际出货为准。
The above data is for reference only. The unit weight is subject to the actual shipment.

4PCS FIX BOLTS COMPLETE 四片壁虎

Size: M6-M16;

Material: carbon steel;

Surface treatment: blue and yellow zinc



规格 SIZE	L	D	管重量 Pipeline Weight	M	成套总重 Weight
M6	40	10	8.5-9	6*50	18.5-19
M8	50	13	16.5-17	8*60	38.6-39
M10	60	17	24.5-25	10*70	67-68
M12	80	19	51.5	12*90	128-132
M16	100	24	125.5	16*110	293-297
M20	130	30	237	20*150	625-630

以上数据仅供参考，单重以实际出货为准。
The above data is for reference only. The unit weight is subject to the actual shipment.

SLEEVE ANCHOR SERIES 套管壁虎系列

Features

- A variety of casing house lizard for different scenes
- Galvanizing
- Hex bolt anchor with conical Nut installation beautiful, flange nut easy to use Hex nut used for all kinds of building accessories fastening
- Wide range of application

Parameter: Electroplate>5MM / Hot dip>50MM

Standard: DIN ANSI BS

Material: carbon steel

Applied in: Doors and windows, decoration, fixed, etc

安装Install



DROP IN ANCHOR 内迫壁虎

Specifications: M6-M20
Material: Carbon Steel



Size	Pcs/carton	Kgs/1000pcs
M6	4000	5.5
M8	2000	10.5
M10	1000	20
M12	500	42
M16	250	93

以上数据仅供参考，单重以实际出货为准。
The above data is for reference only. The unit weight is subject to the actual shipment.

PACKING 包装



OTHER PRODUCTS

其它产品



尼龙螺母
NYLON LOCK NUT



法兰盘螺母
FLANGE NUT



美制重型螺母
A194 2H NUT



木螺丝
WOOD SCREW



法兰盘螺栓
FLANGE BOLTS



内六角螺栓
DIN912 SOCKET SCREW



平垫
FLAT WASHER



牙条
THREADED RODS



U型丝
U BOLTS

PACKING 包装



PALLET 托盘



LOADING 发货

